

# Markwik 21+ 1 Hole Thermostatic Basin Mixer

## ILLUSTRATED

**A6696** (TP6) Markwik 21+ 1 hole thermostatic basin mixer, single sequential lever, demountable with copper tails

## OPTIONS

**A6791** Markwik 21+ deck mounted basin mixer fixing kit for use with 1 taphole Contour 21+ back outlet washbasins

## ILLUSTRATED PRODUCT DETAILS

### Weights

**A6696** 2.50 KG

### Finishes

**A6696**  Chrome (AA)

### Materials

**A6696** Chrome Plated Brass


### Flow rates

**A6696** 7.9 Litres per minute @ 3 bar pressure

### Special Notes

Single sequential lever for on/off operation and temperature control. Fitted with an Armitage Bioguard outlet which reduces the opportunity for biofilm attachment and is lined with antimicrobial copper. Unique built-in thermal disinfection cleansing feature. Spout is removable for autoclave sterilisation. Body demounts for submersible disinfection. During demounting, integral safety valves will shut off water, in case supplies not isolated. Integral isolating valves, strainers, check valves and flow regulators; which are all accessible from above the basin. Temperature factory set to 40±1°C. Suitable for high and low pressure systems. Flow rate regulated to maximum of 10 litres per minute. Clamping ring with three fixing screws for added security.

Accessory fixing kit specifically designed to facilitate the installation of A6696 when used with Contour 21+ closed basins. Fits onto the tail of the basin mixer and rotates the copper tails by 90° inside the hollow basin cavity, with the inlet water connections coming from the rear.

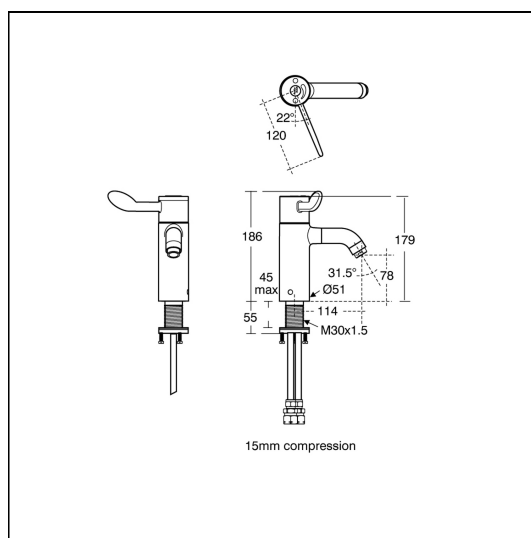

## ACCREDITATIONS



## FEATURES

